



ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109

(815) 229-5077 - FAX (815) 229-5108

www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. ROI-8000

OIL / SAND INTERCEPTOR

DRAWN BY R.P.P.

QUOTE#:


DATE: 06/09/22

JOB NAME:

Note: Standard unit includes 6" manway base.
Additional manway height can be made to
accommodate inlet invert requirements.

OPTIONAL FEATURES (ADDITIONAL COST)

- ☐ ADDITIONAL _____ MANWAY HEIGHT REQUIRED
- ☐ INLET & OUTLET SIZE _____ INCHES
- ☐ EPOXY COATING
- ☐ STAINLESS STEEL CONSTRUCTION
- ☐ DOUBLE WALL CONSTRUCTION
- ☐ LEAK DETECTION
- ☐ HIGH LEVEL SENSOR & ALARM
- ☐ COALESCING PACK
- ☐ PUMP OUT CONNECTION
- ☐ HOLD DOWN PADS
- ☐ RECESSED LIFT HANDLES IN COVERS
- ☐ ANCHOR FLANGE

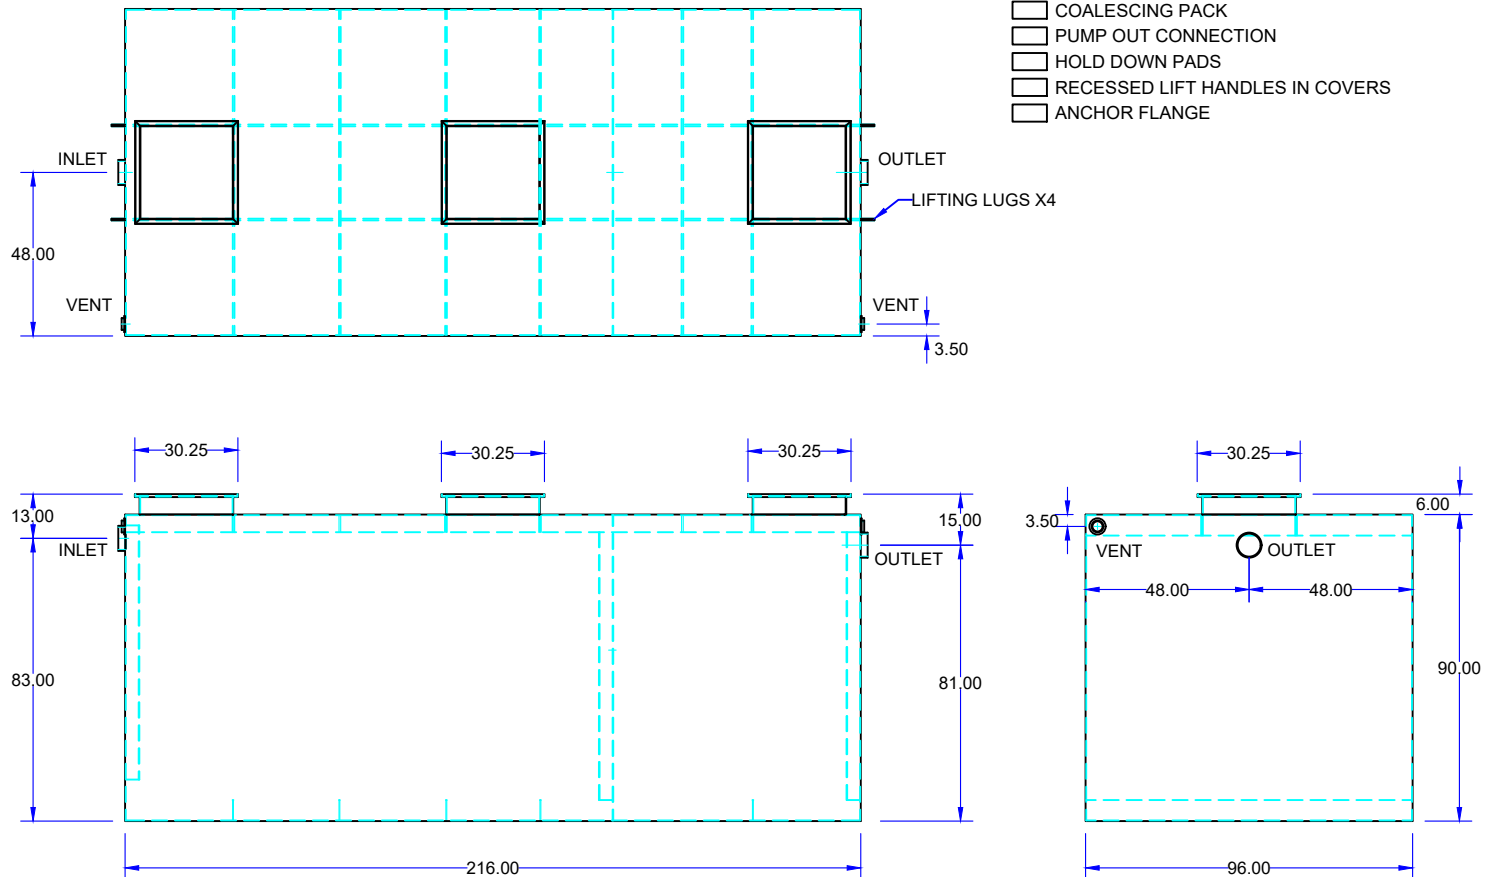

SPECIFICATIONS

Rockford Model ROI-8000 all welded steel gravity oil/sand interceptor, with 4800 intermittent GPM, 8000 gallon capacity, 6" threaded inlet/outlet and 3" vent connections, removable 3/8" nonskid tread plate covers for flush with grade installation suitable for heavy traffic loading (H/20), secured with stainless steel flat head screws, heavy duty leak proof gasket, with bituminous coating outside. Supplied with lifting lugs X4. Approximate ship weight of 11,000 Lbs.

Note: Standard unit includes 6" manway base. Additional manway height can be made to accommodate inlet invert requirements.

Units built to IAPMO/ANSI Z1001-2014 construction standard for fabricated gravity interceptors.

Optional features (Additional cost) listed above

Approved By

Company

Date