



ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109

(815) 229-5077 - FAX (815) 229-5108

www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. GSS-12

SAND SEPARATOR


DRAWN BY R.P.P.

QUOTE#:

DATE: 03/12/24

JOB NAME:

VENT
4 - PLACES


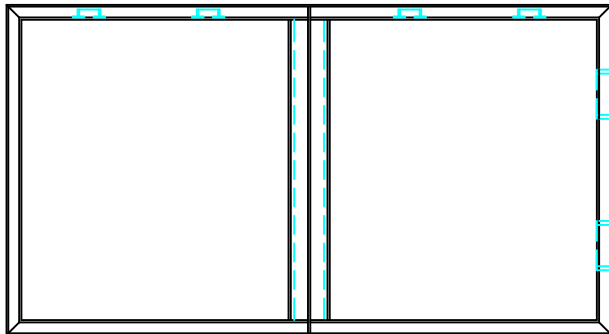


OUTLET

INLET

OPTIONAL FEATURES (ADDITIONAL COST)

- ☐ ANCHOR FLANGE
- ☐ RECESSED LIFT HANDLES _____ PER COVER
- ☐ EPOXY COATING
- ☐ LIGHT TRAFFIC REINFORCED COVERS
- ☐ HEAVY TRAFFIC REINFORCED COVERS
- ☐ STAINLESS STEEL CONSTRUCTION
- ☐ SEDIMENT BASKET
- ☐ INTEGRAL EXTENSION _____ INCHES
- ☐ INLET & OUTLET SIZE _____ INCHES
- ☐ DOUBLE WALL CONSTRUCTION
- ☐ LEAK DETECTION
- ☐ FILTER MEDIUM
- ☐ COALESCING PACK
- ☐ ANODES
- ☐ HOLD DOWN PADS
- ☐ ALUMINUM COVER
- ☐ NO HUB CONNECTION
- ☐ HUB CONNECTION

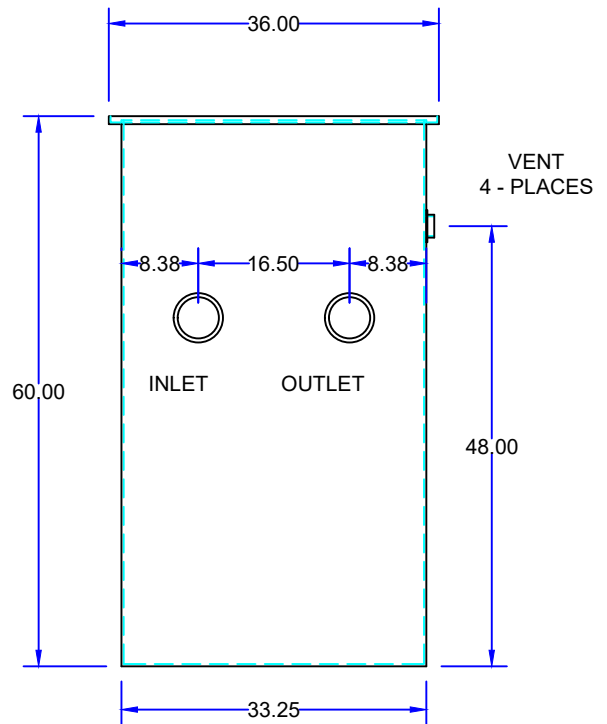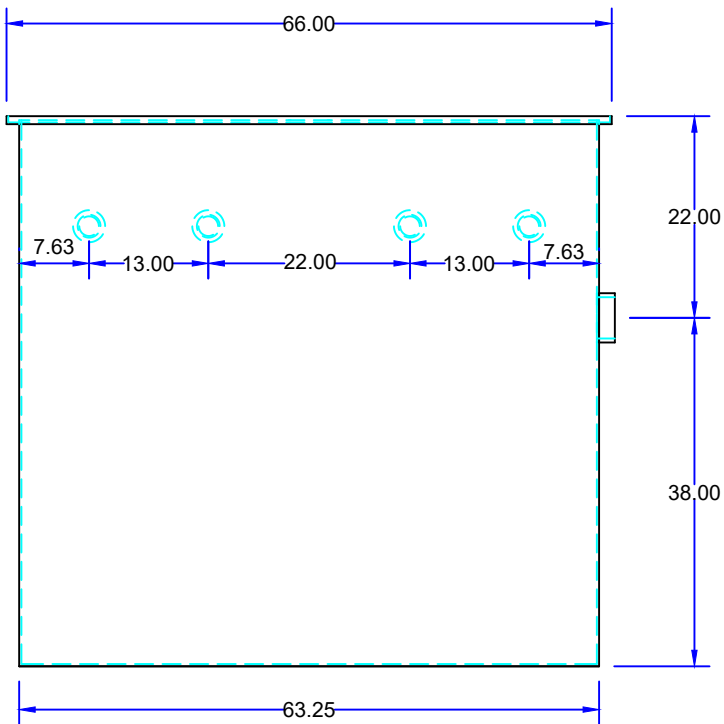

VENT
4 - PLACES

INLET

OUTLET

SPECIFICATIONS

Rockford Model GSS-12 Gravel & Sand Separator all welded A36 1/4" steel, 365 gallon static capacity (49 Cubic feet), 4.00" Threaded inlet and outlet, 2.00" threaded vent connections (4), removable filter screen, non-removable baffle plates, (2) 3/8" nonskid diamond tread plate cover (for flush-with- floor installation) for pedestrian traffic, secured with stainless steel flat head screws, heavy duty leak proof gasket, OPEX shop coating inside & bituminous coating outside.

Optional features (Additional cost) listed above

Approved By

Company

Date