



ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109
(815) 229-5077 - FAX (815) 229-5108
www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. GSS-36

SAND SEPARATOR

DRAWN BY R.P.P.




QUOTE#:

DATE: 03/12/24

JOB NAME:

OPTIONAL FEATURES (ADDITIONAL COST)

- ANCHOR FLANGE
- RECESSED LIFT HANDLES _____ PER COVER
- EPOXY COATING
- LIGHT TRAFFIC REINFORCED COVERS
- HEAVY TRAFFIC REINFORCED COVERS
- STAINLESS STEEL CONSTRUCTION
- SEDIMENT BASKET
- INTEGRAL EXTENSION _____ INCHES
- INLET & OUTLET SIZE _____ INCHES
- DOUBLE WALL CONSTRUCTION
- LEAK DETECTION
- FILTER MEDIUM
- COALESCING PACK
- ANODES
- HOLD DOWN PADS
- ALUMINUM COVER
- NO HUB CONNECTION
- HUB CONNECTION

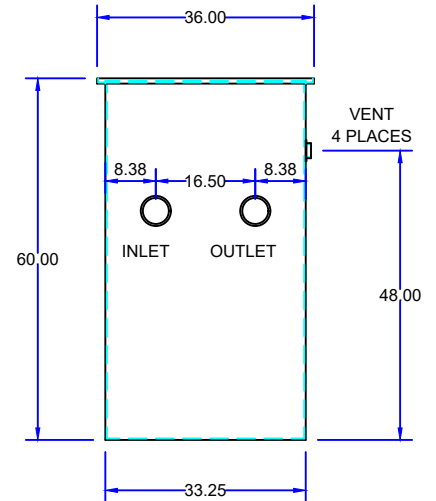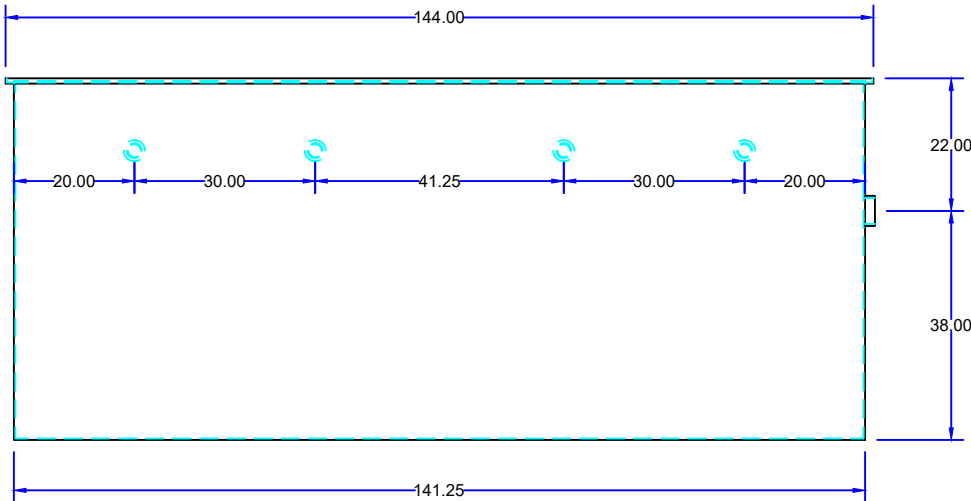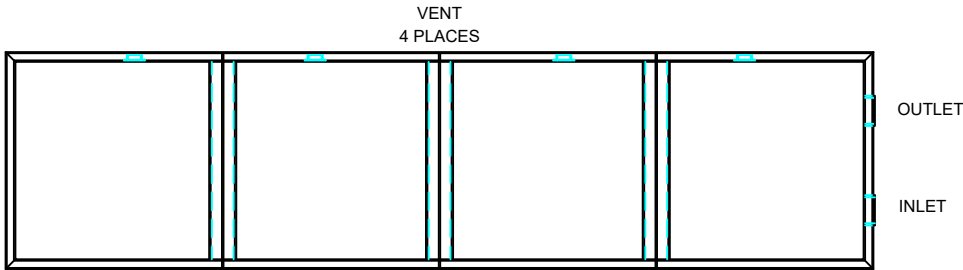

SPECIFICATIONS

Rockford Model GSS-36 Gravel & Sand Separator all welded A36 1/4" steel, 810 gallon static capacity (108 Cubic feet), 4.00" Threaded inlet and outlet, 2.00" threaded vent connections (4), removable filter screen, non-removable baffle plates, (2) 3/8" nonskid diamond tread plate cover (for flush-with-floor installation) for pedestrian traffic, secured with stainless steel flat head screws, heavy duty leak proof gasket, OPEX SHOP COAT coating inside & bituminous coating outside.

Optional features (Additional cost) listed above

Approved By

Company

Date