



ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109
(815) 229-5077 - FAX (815) 229-5108
www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. OST-5636-100

OIL / WATER SEPARATOR

DRAWN BY R.P.P.



QUOTE#:

DATE: 06/06/22

JOB NAME:

OPTIONAL FEATURES (ADDITIONAL COST)

- ☐ ANCHOR FLANGE
- ☐ RECESSED LIFT HANDLES _____ PER COVER
- ☐ EPOXY COATING
- ☐ LIGHT TRAFFIC REINFORCED COVERS
- ☐ HEAVY TRAFFIC REINFORCED COVERS
- ☐ STAINLESS STEEL CONSTRUCTION
- ☐ SEDIMENT BASKET
- ☐ INTEGRAL EXTENSION _____ INCHES
- ☐ INLET & OUTLET SIZE _____ INCHES
- ☐ DOUBLE WALL CONSTRUCTION
- ☐ LEAK DETECTION
- ☐ FILTER MEDIUM
- ☐ COALESCING PACK
- ☐ ANODES
- ☐ HOLD DOWN PADS
- ☐ ALUMINUM COVER
- ☐ NO HUB CONNECTION
- ☐ HUB CONNECTION

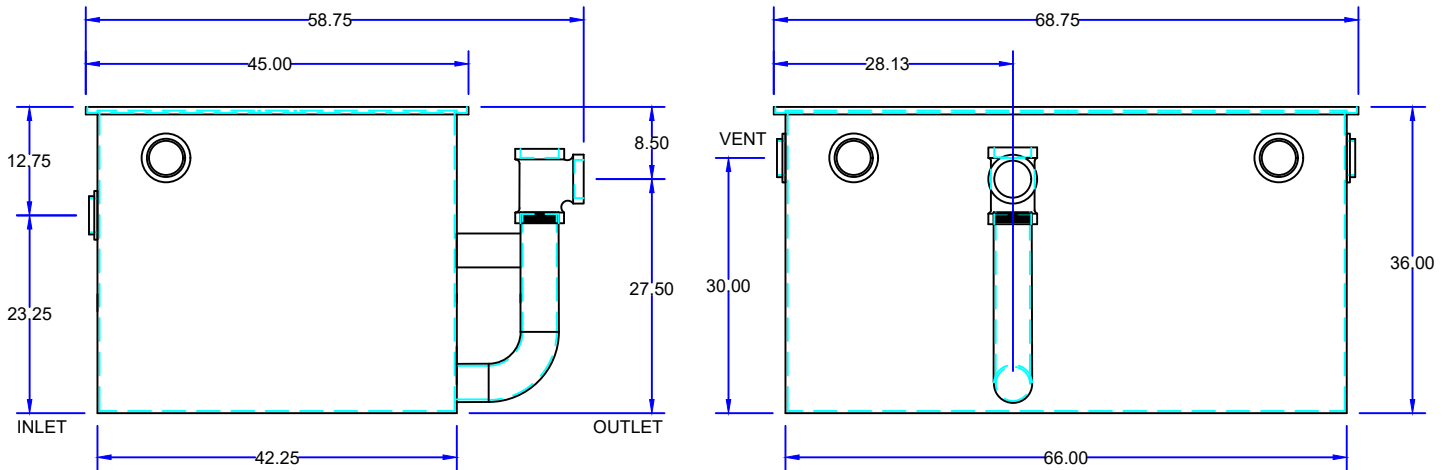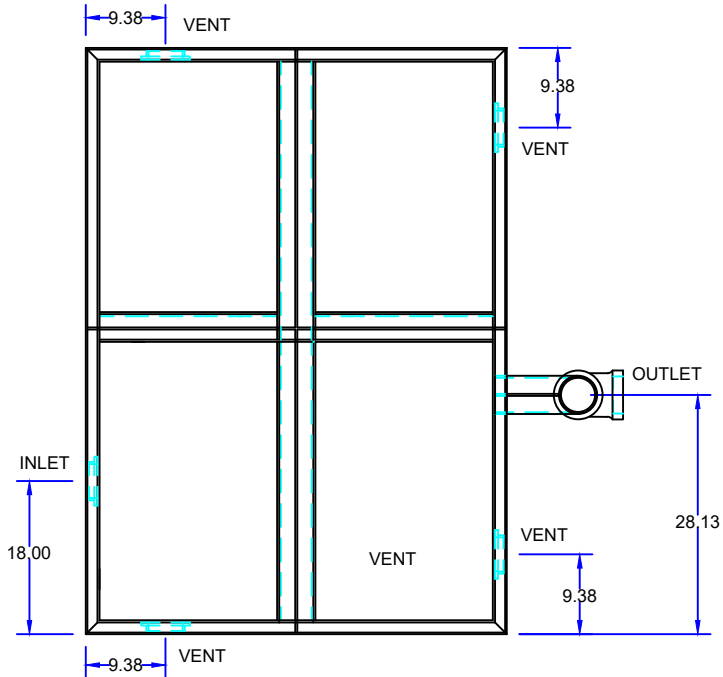

SPECIFICATIONS

Rockford Model OST-5636-100 Oil/Water Separator all welded A36 1/4" steel, 75 g.p.m. intermittent flow, 150 gallon static capacity with 100 gallon waste oil storage, 4.00" threaded inlet/outlet & 4.00" threaded vent connections (4), visible double-wall outside trap seal, removable filter screen, non-removable separator screens, 3/8" nonskid tread plate covers (4) (for flush-with-floor installation) for pedestrian traffic secured with stainless steel bolts with heavy duty leak proof gasket, OPEX SHOP COAT coating inside & bituminous coating outside.

Optional features (Additional cost) listed above

Approved By

Company

Date