



# ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109

(815) 229-5077 - FAX (815) 229-5108

www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. RGI-1500

GREASE INTERCEPTOR

DRAWN BY R.P.P.

QUOTE#:




DATE: 03/01/24

JOB NAME:

## OPTIONAL FEATURES (ADDITIONAL COST)

- ☐ ADDITIONAL \_\_\_\_\_ MANWAY HEIGHT REQUIRED
- ☐ INLET & OUTLET SIZE \_\_\_\_\_ INCHES
- ☐ EPOXY COATING
- ☐ STAINLESS STEEL CONSTRUCTION
- ☐ GREASE MONITOR SYSTEM
- ☐ HOLD DOWN PADS
- ☐ RECESSED LIFT HANDLES IN COVERS
- ☐ ANCHOR FLANGE

Note: Standard unit includes 6" manway base.  
Additional manway height can be made to  
accommodate inlet invert requirements.

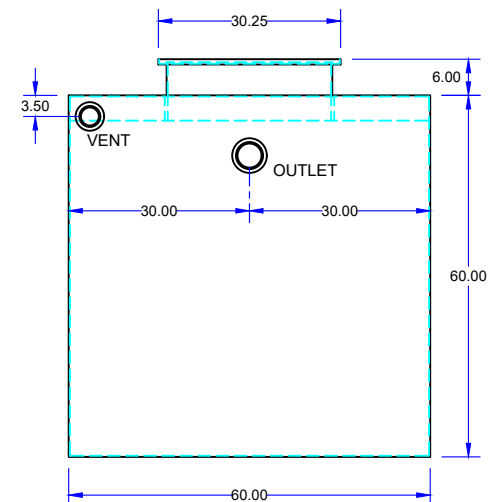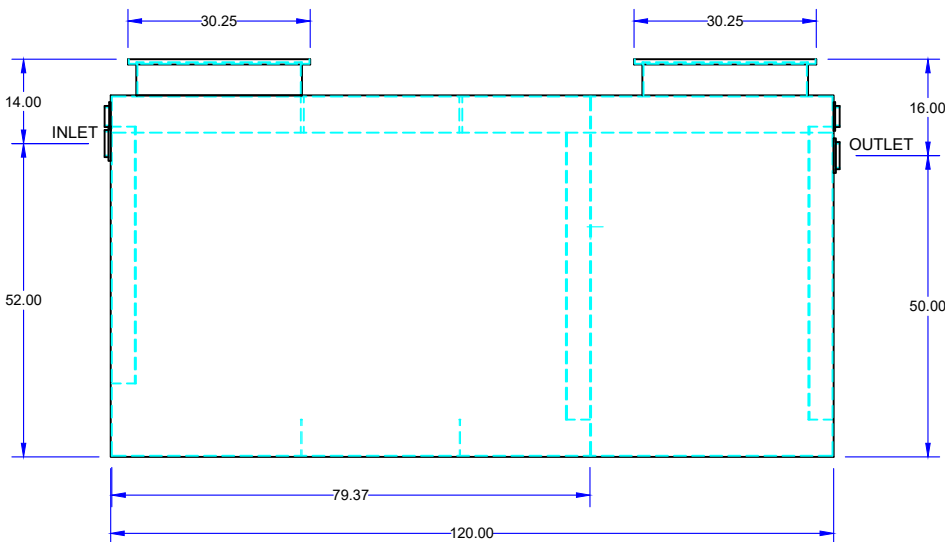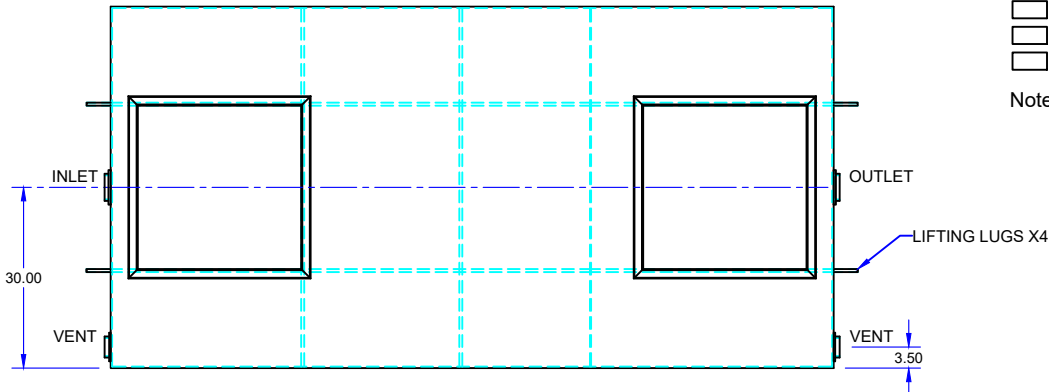

## SPECIFICATIONS

Rockford Model RGI-1500 all welded steel gravity grease interceptor, with 900 intermittent GPM, 1500 gallon capacity, 3,500 LBS greasy sludge capacity, 4.00" threaded inlet/outlet and 3.00" vent connections, removable 3/8" nonskid tread plate cover for flush with grade installation suitable for heavy traffic loading (H/20). secured with stainless steel flat head screws, heavy duty leak proof gasket, with bituminous coating outside. Supplied with lifting lugs X4. Approximate ship weight of 2800 Lbs.

Note: Standard unit includes 6" manway base. Additional manway height can be made to accommodate inlet invert requirements.

Units built to IAPMO/ANSI Z1001-2014 construction standard for fabricated gravity interceptors.

Optional features (Additional cost) listed above

Approved By

Company

Date