



# ROCKFORD SEPARATORS

5159 28th Ave ROCKFORD, IL 61109  
(815) 229-5077 - FAX (815) 229-5108  
www.rkfdseparators.com - rssem@rkfdseparators.com

MODEL NO. GIS-200

GREASE SEPARATOR



DRAWN BY R.P.P.

QUOTE#:

JOB NAME:

### OPTIONAL FEATURES (ADDITIONAL COST)

- ANCHOR FLANGE  CLAMP RING
- RECESSED LIFT HANDLES IN COVERS
- EPOXY COATING  ANODES
- REINFORCED COVER \_\_\_\_\_ LOAD
- STAINLESS STEEL CONSTRUCTION
- SEDIMENT BASKET  FILTER MEDIA
- INTEGRAL EXTENSION \_\_\_\_\_ INCHES
- ALUMINUM COVER
- ALTERNATE INLET & OUTLET SIZE \_\_\_\_\_ INCHES
- ALTERNATE VENT CONNECTION SIZE \_\_\_\_\_ INCHES
- DOUBLE WALL CONSTRUCTION
- LEAK DETECTION
- HOLD DOWN PADS

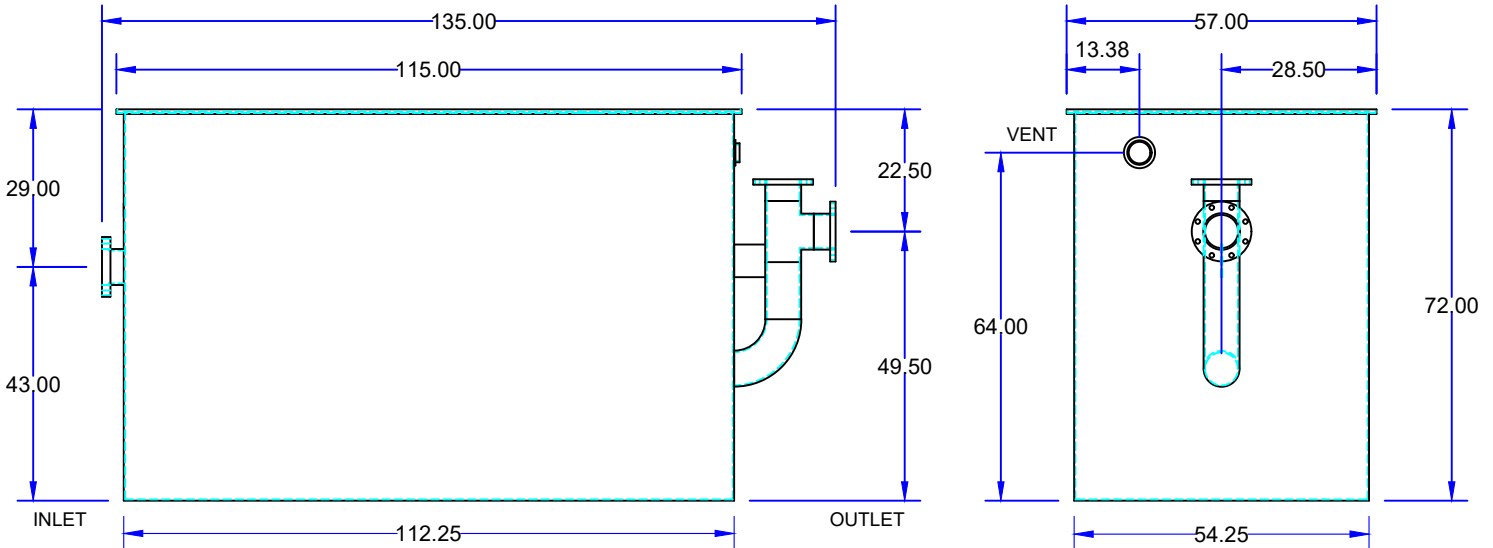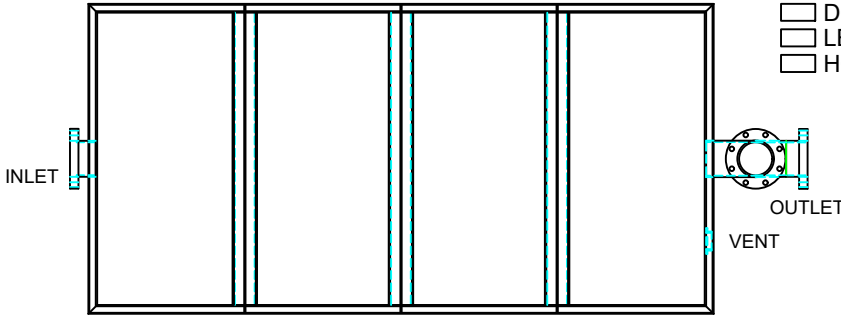

## SPECIFICATIONS

Rockford Model GIS-200 all welded 1/4" steel separator, 1100 gallon static capacity, 750 g.p.m. intermittent flow, 6.00" companion flange inlet/outlet with 3.00" tapped internal vent connection, 5544 lbs greasy sludge capacity, visible double-wall outside trap seal, separator plate and removable filter screen, removable 3/8" nonskid diamond tread plate covers for flush with floor installation suitable for pedestrian traffic secured with stainless flat head screws, heavy duty leak-proof gasket, OPEX Shop Coat coating inside and bituminous coating outside.

Optional features (Additional cost) listed above

Approved By

Company

Date