
Rockford Sanitary Systems, Inc. ROCKFORD, IL 61125-0963


(815) 229-5077 - (800) 747-5077 - FAX (815) 229-5108 WEB SITE-www.rkfdseparators.com E MAIL-rssem@rkfdseparators.com


MODEL NO. GOST-5654-300

DIL/SAND SEPARATOR DRAWN BY QUOTE # JOB NAME W.R.W.

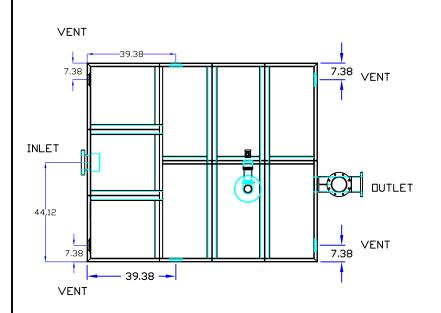

OPTIONAL FEATURES (ADDITIONAL COST) ☐ ANCHOR FLANGE ☐ FILTER MEDIUM RECESSED LIFT HANDLES IN COVERS ☐ EPOXY COATING ☐ ANODES REINFORCED COVERS. □STAINLESS STEEL CONSTRUCTION ⊒SEDIMENT BASKET ☐ INTEGRAL EXTENSION _____INCHES □INLET & OUTLET SIZE __ _ INCHES □ DOUBLE WALL CONSTRUCTION LEAK DETECTION HIGH LEVEL SENSOR & ALARM □ C□ALESCING PACK PUMP DUT CONNECTION

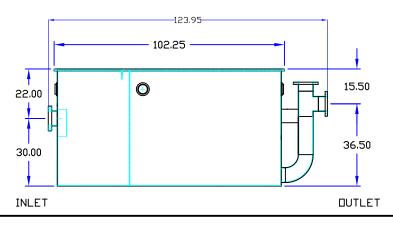



Specifications

Rockford model GDST-5654-300 oil/water separator all welded A36 .25" steel, 300 gpm intermittent flow, 487 gallon static capacity with 300 gallon waste oil storage and an additional 390 gallon sediment chamber, 6" companion flange connections in/out and 4" threaded vent connections, visible double wall outside trap seal, removable filter screen, non removable separator baffles, .37" nonskid treadplate covers for flush with floor installation suitable for pedestrian traffic secured with stainless steel bolts, heavy duty gasket, opex shop coating inside and bituminous coating outside.

Optional features (Additional cost) listed above



Approved By

Company

Date